



GARGIULO


PROFILE TECHNOLOGY WITH SYSTEM



INSULATION

GARGIULO INSUFOX

THE CLEVER
SUBSTRUCTURE SOLUTION

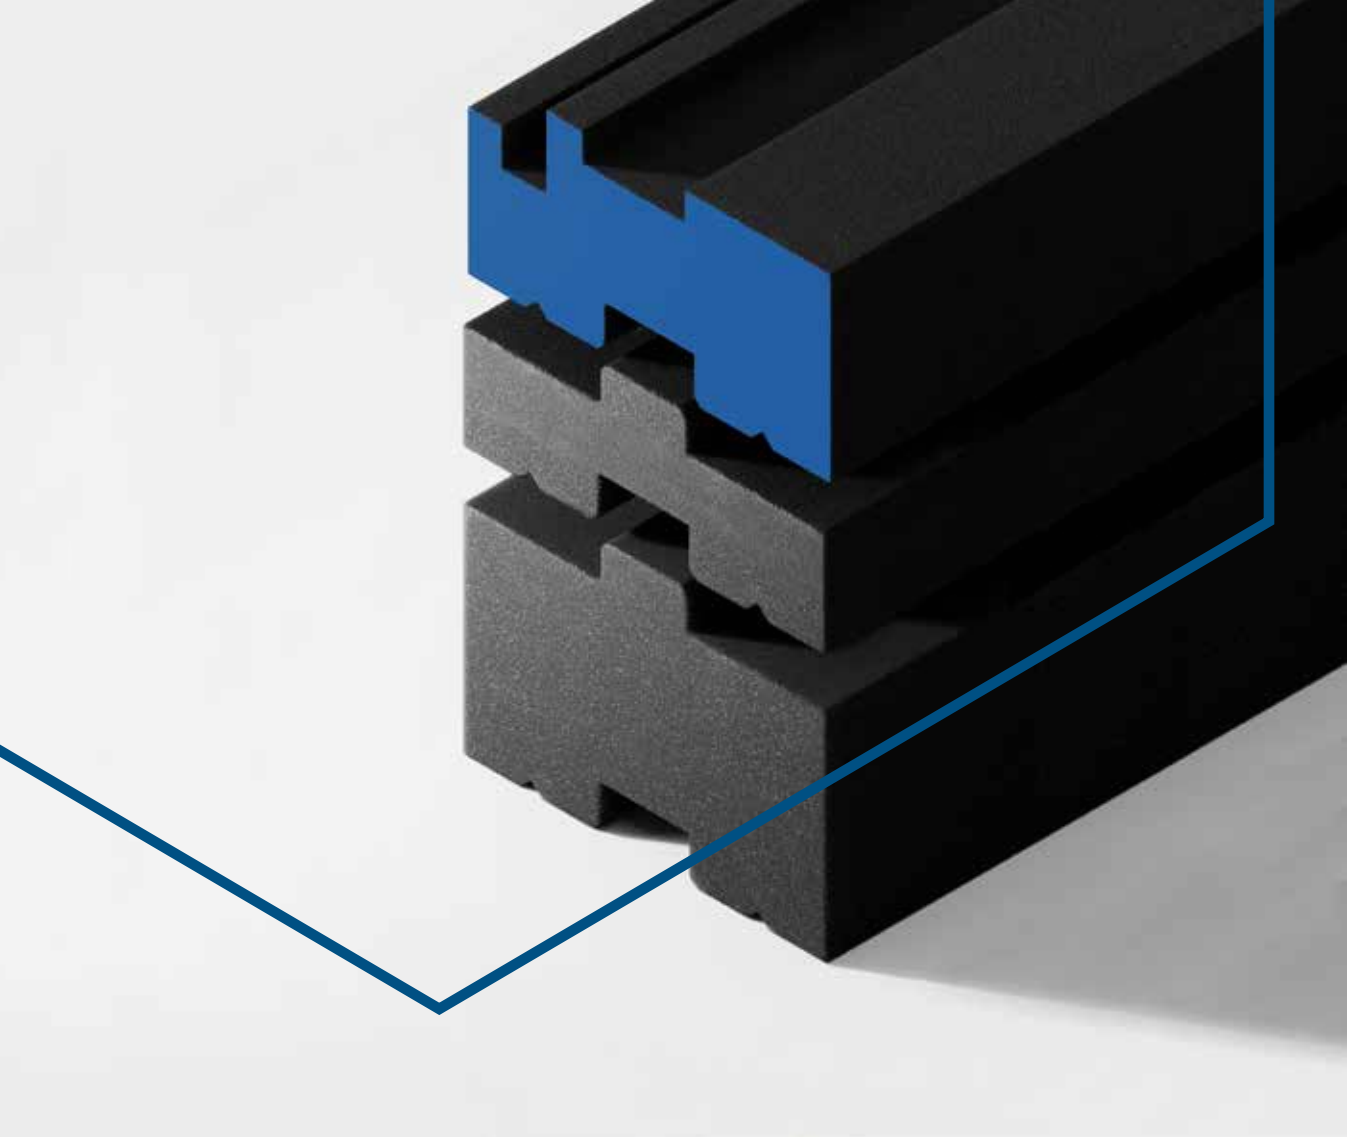

INSU FOX



INSULATION


A WINDOW IS ONLY AS GOOD AS ITS INTEGRATION INTO THE BUILDING STRUCTURE

That's why we developed **INSUFOX** – the clever substructure solution made of highly insulating construction material. **INSUFOX** saves energy and CO₂ – all with maximum compressive strength.

The clever modular system with matching adapter profiles easily adapts to the respective profile requirements. It can be produced in any length – thus enabling cut-optimised work.

With **INSUFOX**, window systems companies, fabricators, fittings distributors and manufacturers achieve a new level for the substructure – the **FOX LEVEL**.

ENTER THE
FOX LEVEL

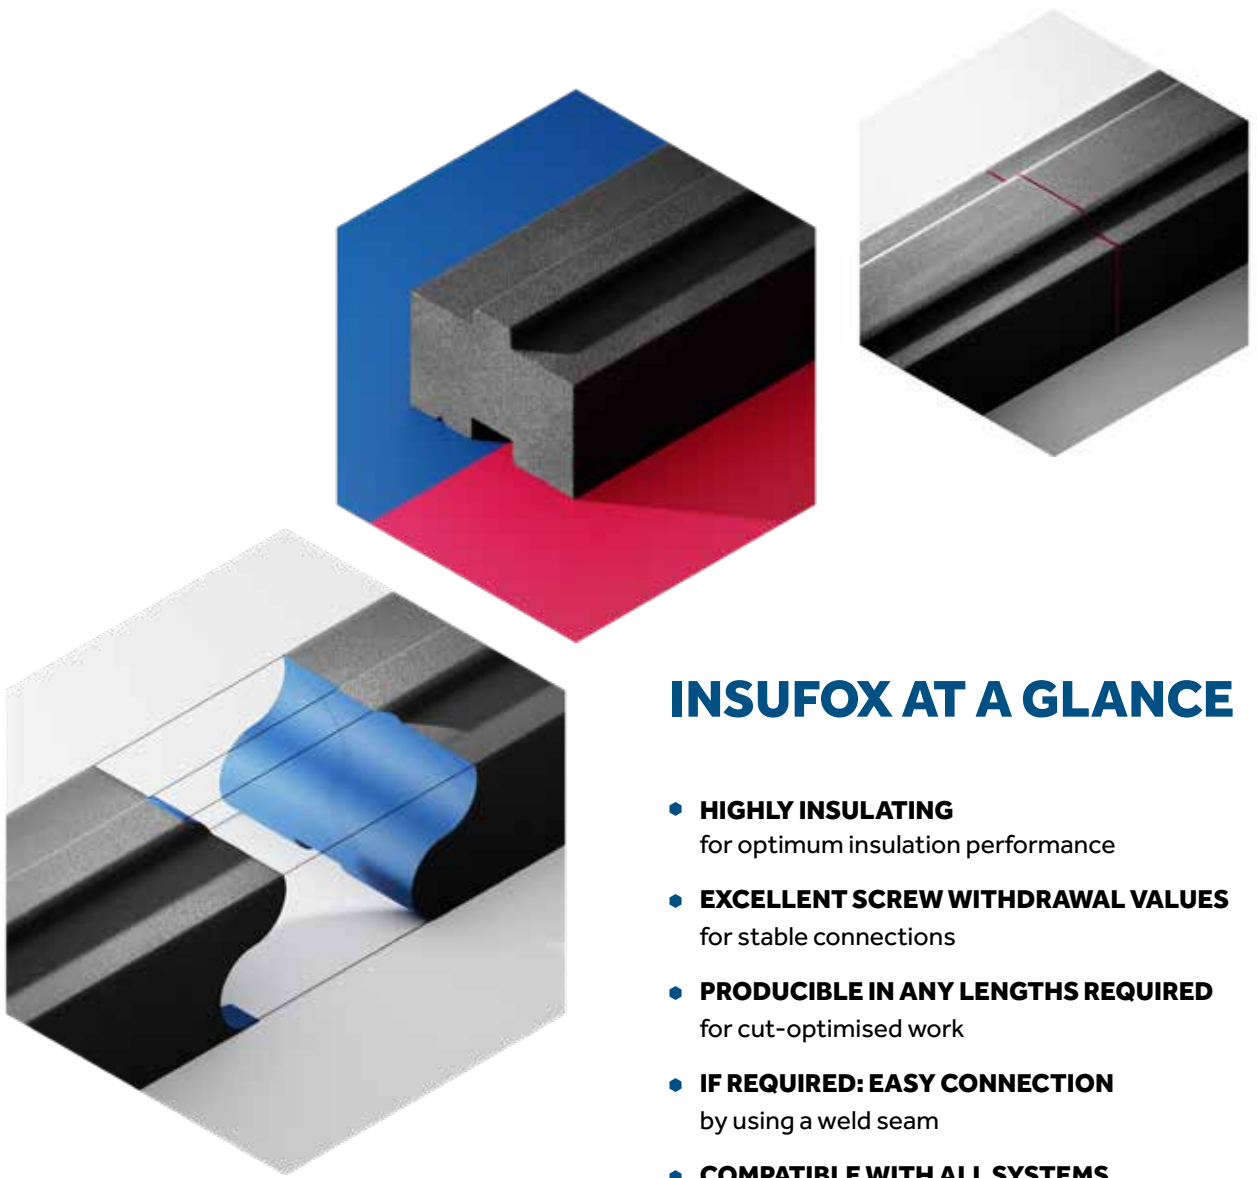

INSUFOX AT A GLANCE


- **HIGHLY INSULATING**
for optimum insulation performance
- **EXCELLENT SCREW WITHDRAWAL VALUES**
for stable connections
- **PRODUCIBLE IN ANY LENGTHS REQUIRED**
for cut-optimised work
- **IF REQUIRED: EASY CONNECTION**
by using a weld seam
- **COMPATIBLE WITH ALL SYSTEMS**
thanks to the tailor-made adapter profile
- **SIMPLE EXTENSION OF THE INSTALLATION HEIGHT**
with a practical tongue and groove system
- **MATERIAL MADE OF RECYCLABLE RAW MATERIAL**
for resource-friendly production
- **OUTSTANDING TEMPERATURE RESISTANCE**
from -40 °C to +200 °C




IN DETAIL – THE FACTS

The modular system made of highly insulating construction material can consist of a modified adapter profile and various substructure profiles in different modular dimensions (for example, 15 mm).


The installation depth can vary (for example, 50 mm).
The supply length can be selected as desired.

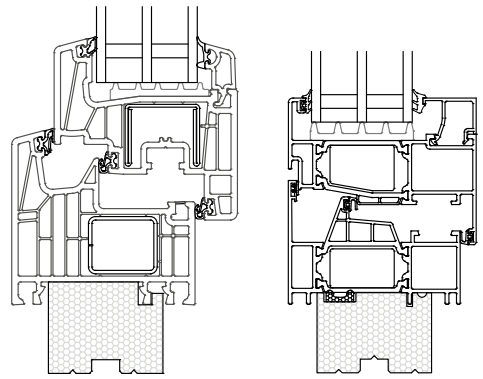

Adapter profile (system-specific)
Example for an aluminium or brick windowsill

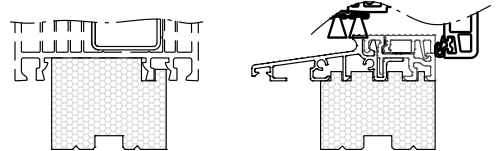


Substructure profiles with a modular dimension of 15 mm

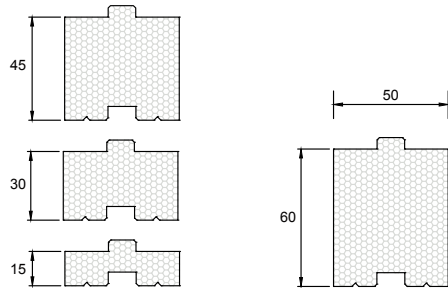


The product is installed in a practical tongue and groove system.

If required, additional adhesive or screw connections can be used.

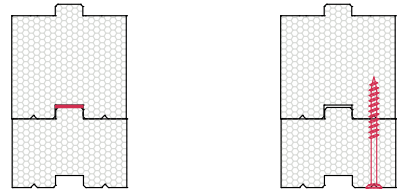



Maximum air tightness through sealing with self-adhesive PE foam profiles

Adhesive tape or similar products serve as an installation aid and possible waterproofing with a suitable adhesive sealant

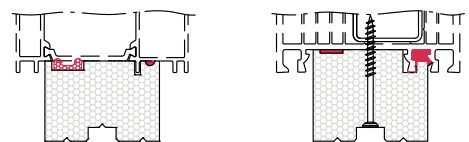

Sample installation height with a modular dimension of 15 mm

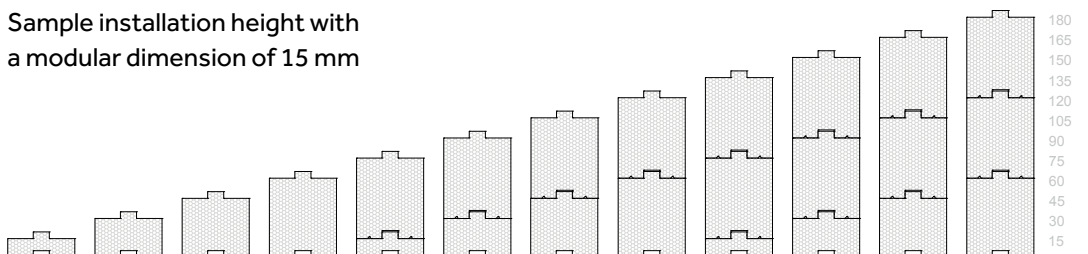

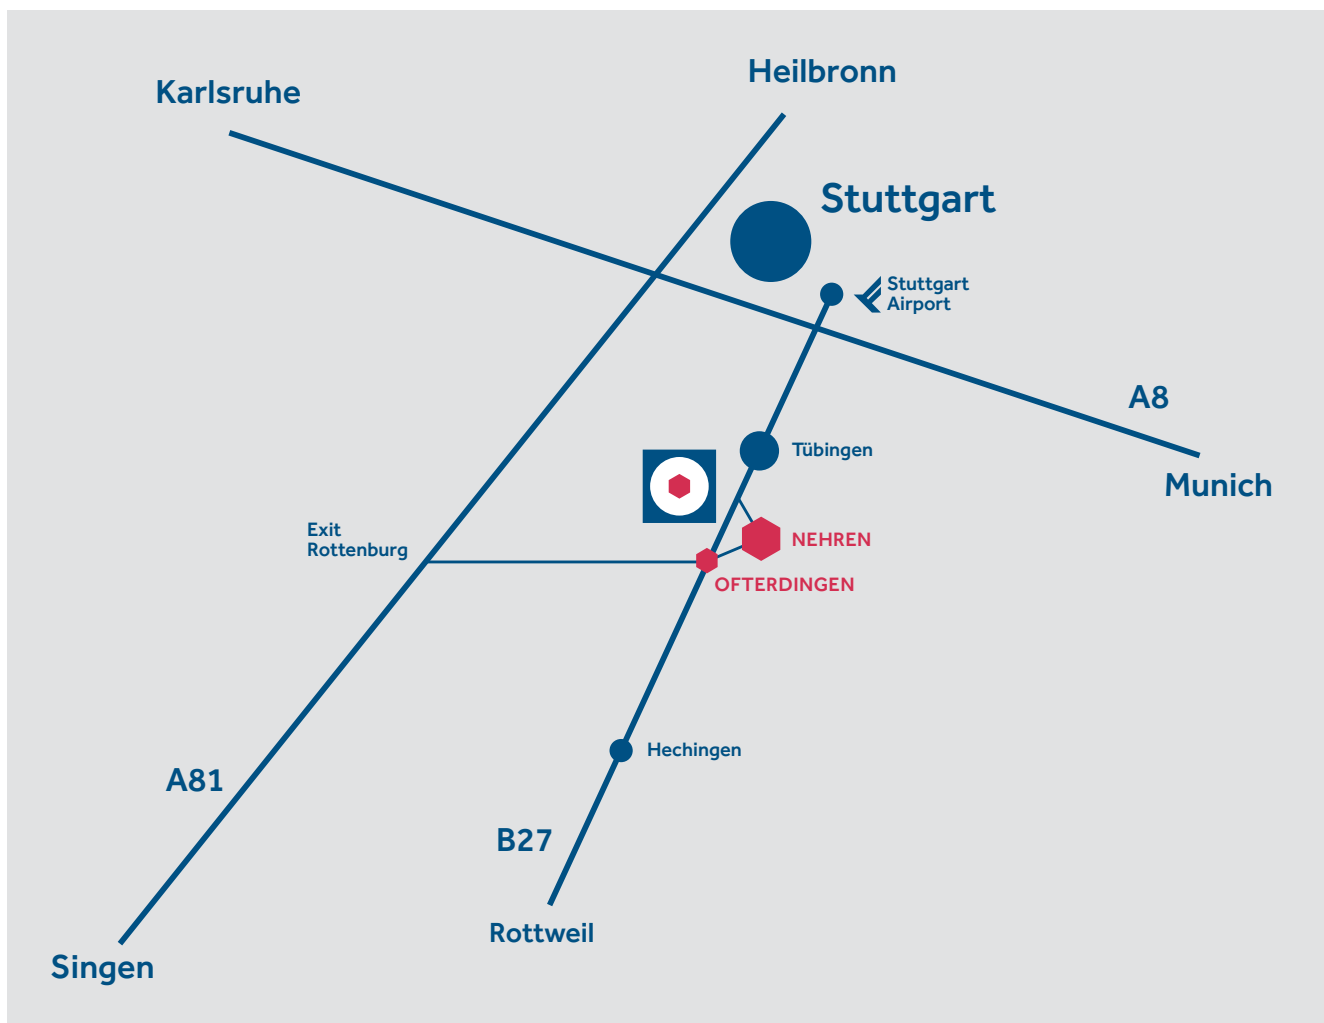

GARGIULO GmbH

Daimlerstr. 21
72147 Nehren
Germany

Tel.: +49 7473 - 9438-0
Fax: +49 7473 - 9438-250
E-Mail: info@gargiulo.de
www.gargiulo.de

Version: 02.2024

